

VJR-A3-SP Support Bracket

VJR-A3-SP



Installation Guide

4

1 VJR-A3-SP In-ceiling Support Bracket Installation Guide

1.1 Important Safety Instructions

Read, follow, and retain all of the following safety instructions. Heed all warnings on the unit and in the operating instructions before operation.

- 1. Clean only with a dry cloth. Do not use liquid cleaners or aerosol cleaners.
- 2. Do not install unit near any heat sources such as radiators, heaters, stoves, or other equipment (including amplifiers) that produce heat.
- 3. Do not block any ventilation openings.
- 4. Do not use the unit near water or expose to rain or moisture. Never spill liquid of any kind on the unit.
- 5. Unplug the unit during lightning storms or when unused for long periods. Take precautions to protect the unit from power and lightning surges.
- 6. Adust only those controls specified in the operating instructions.
- 7. Do not overload outlets and extension cords, as this can cause fire or electrical shock.
- 8. Protect the plug and power cord from foot traffic or pinching, at electrical outlets, and at its exit from the unit.
- 9. Operate the unit only from the type of power source indicated on the label.
- 10. Unless qualified, do not attempt to service a damaged unit yourself. Refer all servicing to qualified service personnel.
- 11. Use only replacement parts specified by the manufacturer.
- 12. Install in accordance with the manufacturer's instructions in accordance with applicable local codes.
- 13. Use only attachments/accessories specified by the manufacturer. Equipment change or modification could void the user's guarantee or authorization agreement.

You can view and print the full version of this Installation Manual with Adobe Acrobat Reader, both provided on the enclosed CD-ROM. This user guide is the intellectual property of Bosch Security Systems; protected by copyright. Contact: www.boschsecurity.com

2 Installing the VJR-A3-SP Support Bracket

To secure the VJR-A3-SP kit to a suspended ceiling:

1. Locate the bracket assembly at the desired location. Loosen the securing screws on the base bracket assembly (refer to *Figure 2.3*) enough to retain the suspension bars during handling, but allowing adjustment during installation.




Figure 2.1 Ceiling Mounting (Top View)

1	Ceiling Tile
	Suspension Bars
	Ceiling Base Bracket
	Securing Screw
5	Bracket Clip

2. Snap the bracket clips over the ceiling rails. Slide the base plate to the desired position on top of the tile.

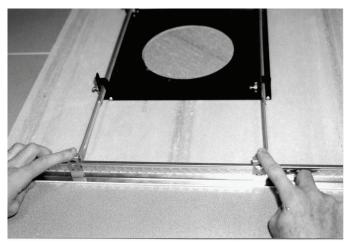


Figure 2.2 Bracket Clip Fitting

3. Tighten the four (4) bracket securing screws located in each corner.



Figure 2.3 Bracket Securing Screws

4. Secure the bracket assembly to an overhead securing point using a user-supplied safety cable.



Figure 2.4 Safety Cable Fitment

- 5. Use two (2) pencils (or a pencil and nail) and the template tool to trace a 200 mm diamter hole with a tolerance of ± 2.2 mm (7.8 in. \pm 1/8 in.) in the center of the mounting plate.
- 6. Drill or cut the hole out of the suspended ceiling tile.
- 7. Install the unit as instructed in the AutoDome Junior HD User's Manual.

Bosch Security Systems, Inc.

www.boschsecurity.com

© Bosch Security Systems, Inc., 2010